

ON45 ON47 | GAC AG FILTER


Bassa perdita di carico/ Low pressure drop.

Azione batteriostatica/ Bacteriostatic action.

Il carbone attivo granulare (GAC)
elimina odori e sapori sgradevoli
Granular activated carbon (GAC)
removes bad taste and odours

Riduce il cloro/ Reduces chlorine

Prodotto conforme al
DM174/04
Product compliant with
DM174/04

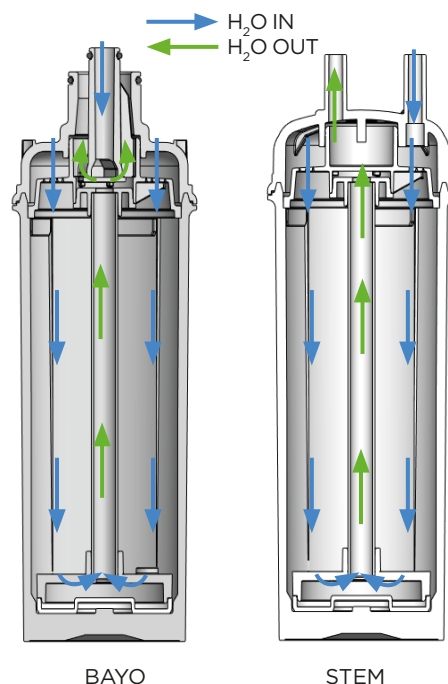

Caratteristiche

- Cartucce monouso costituite da un mezzo filtrante di carbone attivo granulare (GAC) trattato con argento ad effetto batteriostatico.
- Grado di riduzione nominale per i sedimenti di 50µm e può quindi essere utilizzato come stadio di pretrattamento.
- La versione Bayo prevede un attacco rapido a baionetta, mentre la versione Stem si caratterizza per connessioni IN/OUT con codolo tubo 10 mm.

Features

- Disposable cartridges consisting of a filter medium of granular activated carbon (GAC) treated with silver with bacteriostatic effect.
- The filter also has a nominal filtration degree for sediments of 50µm and can therefore be used as a prefiltration stage.
- The Bayo version has a quick bayonet connection, while the Stem version has IN/OUT male connections with 10 mm tube.

ON45 BAYO

Codice Code	Descrizione Description	Portata max. Max flow	Autonomia Capacity	€
		l/min.	l	
ON45S00	ON45 Small GAC Ag filter Bayo	5	19.000	
ON45M00	ON45 Medium GAC Ag filter Bayo	8	38.000	
ON45L00	ON45 Large GAC Ag filter Bayo	10	64.500	



ON47 STEM

Codice Code	Descrizione Description	Portata max. Max flow	Autonomia Capacity	€
		l/min.	l	
ON47S00	ON47 Small GAC Ag filter Stem	5	19.000	
ON47M00	ON47 Medium GAC Ag filter Stem	8	38.000	
ON47L00	ON47 Large GAC Ag filter Stem	10	64.500	




* Autonomie con uso discontinuo max 0,5 l ogni 5 minuti - L'autonomia e le caratteristiche prestazionali dell'apparecchio dipendono fortemente dalla qualità dell'acqua in ingresso
* Capacities when used discontinuously max 0,5 l every 5 minutes - Capacity and performance of the device depends highly on inlet water quality



Temperatura/Temperature
Min. 2 °C (35 °F) / Max 39 °C (100 °F)

Pressione/Pressure
Min. 0,7 bar / Max 8,6 bar

Funzionamento verticale
Vertical functioning

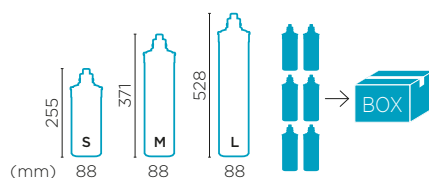

PPO

Testata/ Head

pp

Corpo filtro/ Filter body

MADE IN ITALY